Lynx-DE

SA LYNX-DE 26W/827 G24Q-3 SLV

0025919

Range features

- Compact and high performance pin-base lamp for new and existing installations
- Suitable for operation on electronic control gear
- To be operated on electronic ballast only
- Suitable for emergency lighting
- Excellent luminous flux
- Excellent colour rendering (CRI=85)
- Dimmable with suitable dimmer
- Available in Homelight (2700K), Warm White (3000K), white (3500K), Cool White (4000K) and Daylight (6500K)
- Average rated life: 12000 hours

PRODUCT OVERVIEW

Ordering number	0025919
Technology	Compact Fluorescent
Light colour	827 Homelight
Energy class	A
Average life (Rated) (h)	12000
Lamp shape	Stick
Lamp finish	frosted
Dimmable	YES
Cap/Base	G24q-3
Type	Lynx DE
EAN code	5410288259192
CRI (Ra)	80
Colour temperature (K)	2700
Luminous flux (Rated) (lm)	1800
Efficacy (Rated) (lm/w)	66
Watt (Nominal) (W)	26
Voltage (V)	105

Lynx-DE

SA LYNX-DE 26W/827 G24Q-3 SLV

0025919

DATA TABLE

Lynx-DE

SA LYNX-DE 26W/827 G24Q-3 SLV

0025919

General data

Ordering number	0025919
Dry applications use only	yes
Technology	Compact Fluorescent
Energy class	A
Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Lamp shape	Stick
Lamp finish	frosted
Dimmable	YES
Cap/Base	G24q-3
Type	Lynx DE
EAN code	5410288259192
E-number SE	8357378
E-number FI	4944116
Long description	Compact and high performance pin-base lamp for new and existing installations. Suitable for operation on electronic control gear. To be operated on electronic ballast only. Suitable for emergency lighting. Excellent luminous flux. Excellent colour rendering (CRI=85). Dimmable with suitable dimmer. Available in Homelight (2700K), Warm White (3000K), white (3500K), Cool White (4000K) and Daylight (6500K). Average rated life: 12000 hours
Product name	SA LYNX-DE 26W/827 G24Q-3 SLV
Lamp mercury content (mg)	< 2.50 mg
Starting time (max) (s)	10 Sec
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60901
IEC Reference 2	IEC 61199
IEC Reference 3	IEC 60921
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Rated survival factor at 2000 h 50Hz	0.99
Rated survival factor at 2000 h High Frequency	1
Rated survival factor at 4000 h 50Hz	0.98
Rated survival factor at 4000 h High Frequency	1
Rated survival factor at 6000 h 50Hz	0.93
Rated survival factor at 6000 h High Frequency	1
Rated survival factor at 8000 h 50Hz	0.88
Rated survival factor at 8000 h High Frequency	0.99
Rated survival factor at 12000 h 50Hz	0.70
Rated survival factor at 12000 h High Frequency	0.9

Lynx-DE

SA LYNX-DE 26W/827 G24Q-3 SLV

0025919

Rated survival factor at 16000 h 50Hz	0.71
Rated survival factor at 16000 h High Frequency	0.71

Optical data

Light colour	827 Homelight
CRI (Ra)	80
Colour temperature (K)	2700
Luminous flux (Nominal) at 35°C (lm)	2900
Luminous flux (Nominal) (lm)	1800
Luminous flux (Rated) (lm)	1800
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h 50Hz	0.9
Rated lumen maint. factor at 4000 h 50Hz	0.84
Rated lumen maint. factor at 6000 h 50Hz	0.82
Rated lumen maint. factor at 8000 h 50Hz	0.81
Rated lumen maint. factor at 12000 h 50Hz	0.75
Rated lumen maint. factor at 2000 h High Frequency	0.9
Rated lumen maint. factor at 4000 h High Frequency	0.86
Rated lumen maint. factor at 6000 h High Frequency	0.82
Rated lumen maint. factor at 8000 h High Frequency	0.79
Rated lumen maint. factor at 12000 h High Frequency	0.75

Electrical data

kWh per 1000 hours burning time	31
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	66
Efficacy (Rated) (lm/w)	66
Watt (Rated) - High frequency (W)	25.5
Watt (Rated) (W)	26
Watt (Nominal) (W)	26
Voltage (V)	105
Current (A)	0.325

Lynx-DE

SA LYNX-DE 26W/827 G24Q-3 SLV

0025919

Physical data

Weight (kg)	0.07
Length base to base (mm) - A	164
Lamp Length (mm) - C/L	148
Max. Lamp Diameter (mm) - D	35
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	17.30 x 3.60 x 3.60
Outer package dimensions (L x W x H) (cm)	18.40 x 8.00 x 18.70

Lynx-DE

SA LYNX-DE 26W/827 G24Q-3 SLV

0025919

TECHNICAL DRAWINGS

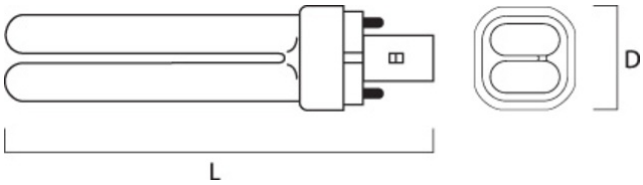

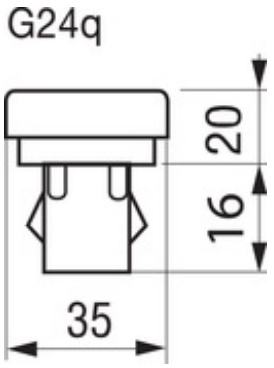

ENERGY LABEL